



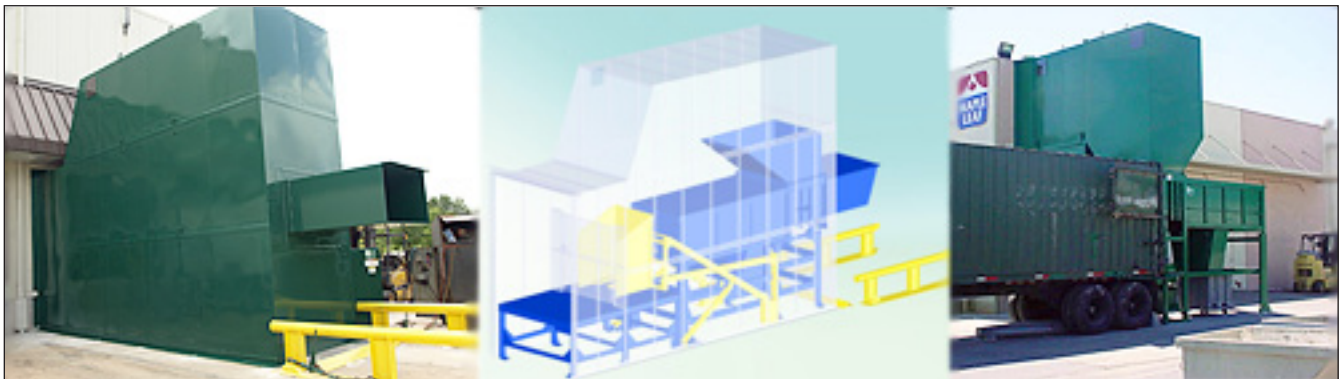

CP-155 Food Waste Compactor

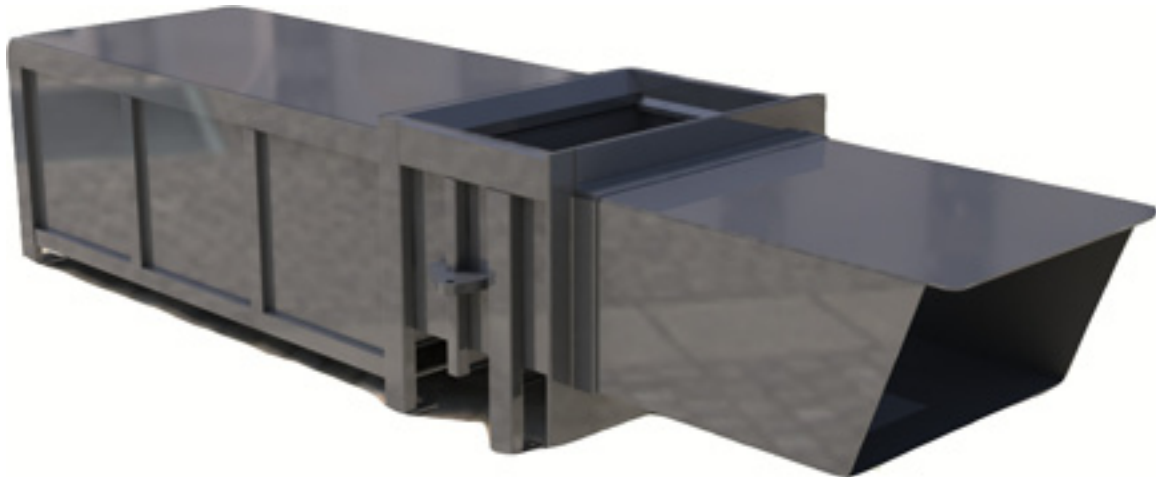

Model CP-155 FW

- Motor and cylinders generate over 70,000 lbs. of pressure for maximum compression
- Rugged design includes 1/2" AISI 1040 floor plate & 3/8" side panels
- Reduces labor and handling
- Meets or exceeds ANSI Z245.2 Safety Standards
- System can be fully integrated into your production process to provide "Hands Free" scrap processing.

1.55 Cu. Yd. Capacity

- Ram penetration of 72" to prevent waste spillage
- Quality electrical and hydraulic components, specified for dependability, serviceability and nationwide availability
- Industry's Leading Warranty:
 - 3 Years on Ram and Frame Assemblies
 - 1 Year on All Parts
 - 1 Year on Labor

STANDARD FEATURES

Base Unit Weight 1,519 lbs.

- Frame: Floor, AISI 1045 Steel Plate 1/2"
 Floor Supports S4 x 7.7#
 Side Plates 3/8"
 Side Reinforcements TS 6" x 3" x 1/4" &
 TS 3" X 3" X 1/4"
 Ram Hold Down Bar 1" x 1-1/2"
 Breaker Bar Angle 8" X 6" X 1"
 Load Binders 90,000# Capacity
- Ram: Face Plate 3/4"
 Floor Plate 3/4"
 Side Plates 3/8"
 Top Plate 3/8"
 Top Plate Reinforcement C6 x 8.2#
 Nylatron Side Guide System
- Removable Access Panels
- Remote Power Unit w/ 10 ft. Hoses Limit Switch, & Power Cable
- Reservoir: 75 Gallon Capacity

- Cycle Time: 69 seconds
- Motor: 20 H.P. Tri-Volt 3 PH.
 (FC: 30 H.P. Tri-Volt 3 PH.)
- Pump: 25 GPM (FC: 45GPM)
- Cylinder Bore, Rod, and Stroke
 7 X 5 X 116
- Controls In Main Panel:
 Key Lock On/Off Switch
 Emergency Stop Button
 Green Start Button
 Automatic Multi Cycle / Sustain Manual
 Pressure Selector
 Automatic Safety Retract
 Full Load/Jam Shut-off w/ Indicator Light
 Ram Position Selector



ENVIRONMENTAL INDUSTRY ASSOCIATION



WASTE EQUIPMENT TECHNOLOGY ASSOCIATION



Institute of Scrap Recycling Industries, Inc.

OPTIONAL FEATURES

- Adjustable Bottom Panels
- Covered Rear or Side Load Hopper Assembly
- Forks and Splash Shield Painted
- DD Carriage System for 155° Dump Angle
- Full Enclosure w/Smooth Sides & Plexiglass Windows
- Inside Vertical Lift or Swing Interlocked Door
- Auto Cycle System incl. Dump Cycle Counter
- Compactor Stand for Trailer Loading
- Trailer Guide System
- Dolly-Lok Trailer Restraint System w/ Indicators
- Jog-Off-Run Controls
- Main Controls Remote on 15' Cable
- PLC Integrated Controls
- Sonic Starting System
- Cycle Count System w/adv. Full and Full Load Indicators
- Hot/Low Oil Indicator with Shut-off
- UL Certified Controls and Panel
- Power Unit Cover w/Lockable Door
- Power Unit Oil Containment System
- Platform or Fork-type Scale
- Dumper
- Dumper Stand
- UL Certified Controls

!CAUTION! This equipment should be operated by properly trained personnel. Improper use, misuse or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. Due to its commitment to quality, SP Industries' specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing.



Distributed By:



We are Social!



SP INDUSTRIES, INC.
 2982 Jefferson Road
 Hopkins, MI 49328

Phone: 800.592.5959 or 269.793.3232
 Fax: 269.793.3232
 Web: www.sp-industries.com
 Email: sp_industries_inc@sp-industries.com