

The Symbol of Excellence



High Density, Dual Cylinder Heavy Commercial, Dry Pack Compactor

Rear Load Security Chute & Side Mounted Power Unit



Side Load Security Chute & Deck Mounted Power Unit



Model CP-2102


2 cu. yd. Stationary Compactor

- Reduce Hauling Costs - Compacting waste with a dual cylinder compactor means fewer trips to the landfill.
- Reduce Employee Labor - Use the compactor instead of your employees to break down large bulky refuse.
- Reduce employee pilferage with a security chute system.
- Meets or Exceeds Current ANSI Safety Standards for Stationary Compactors.
- Dry Pack, Forward Sloping Floor Design - Liquid waste runs into the container reducing unsightly and offensive liquid discharge behind the ram and under the compactor.
- Heavy Commercial/Light Industrial Construction for applications with 1 to 2 container pulls per week.
- Large 42" x 57" Clear Top Opening.
- Engineering services for system designs that meet your individualized needs.
- American Manufacturer Electrical and Hydraulic Components - Specified for dependability, serviceability and nationwide availability.
- Outperforms and outlasts all other stationary compactors in its class.
- Industry's leading Warranty
 - Three Years Ram and Frame Weldment
 - One Year Electrical and Hydraulic Components
 - Parts and Labor



Printed On Recycled Paper

Compactor Model	Mrf's Rating (cu. yds.)	WASTE C Type Rating (cu. yds.)	Clear Top Opening (In.)		Chamber Length (In.)	Ram Stroke (In.)	Ram Penetration (In.)	Force Rating (Ram PSI at stated forces lbs.)		Hydraulic Syst. Pressure PSI		Ram Face (In.)		Volume Displacement (cu. yds. per hr.)	Motor H.P.	Cycle Time (sec.)	Discharge Opening (in.)			Base Unit Weight (lbs.)
			Length	Width				Normal	Maximum	Normal	Max.	Width	Height				Width	Height	From Gnd.	
CP-2102	2	1.47	42	57.5	43.5	60	16.5	44.8/70,700	49.8/78,500	1800	2000	59.5	26.5	84	10	63	61.5	33.5	16	6200

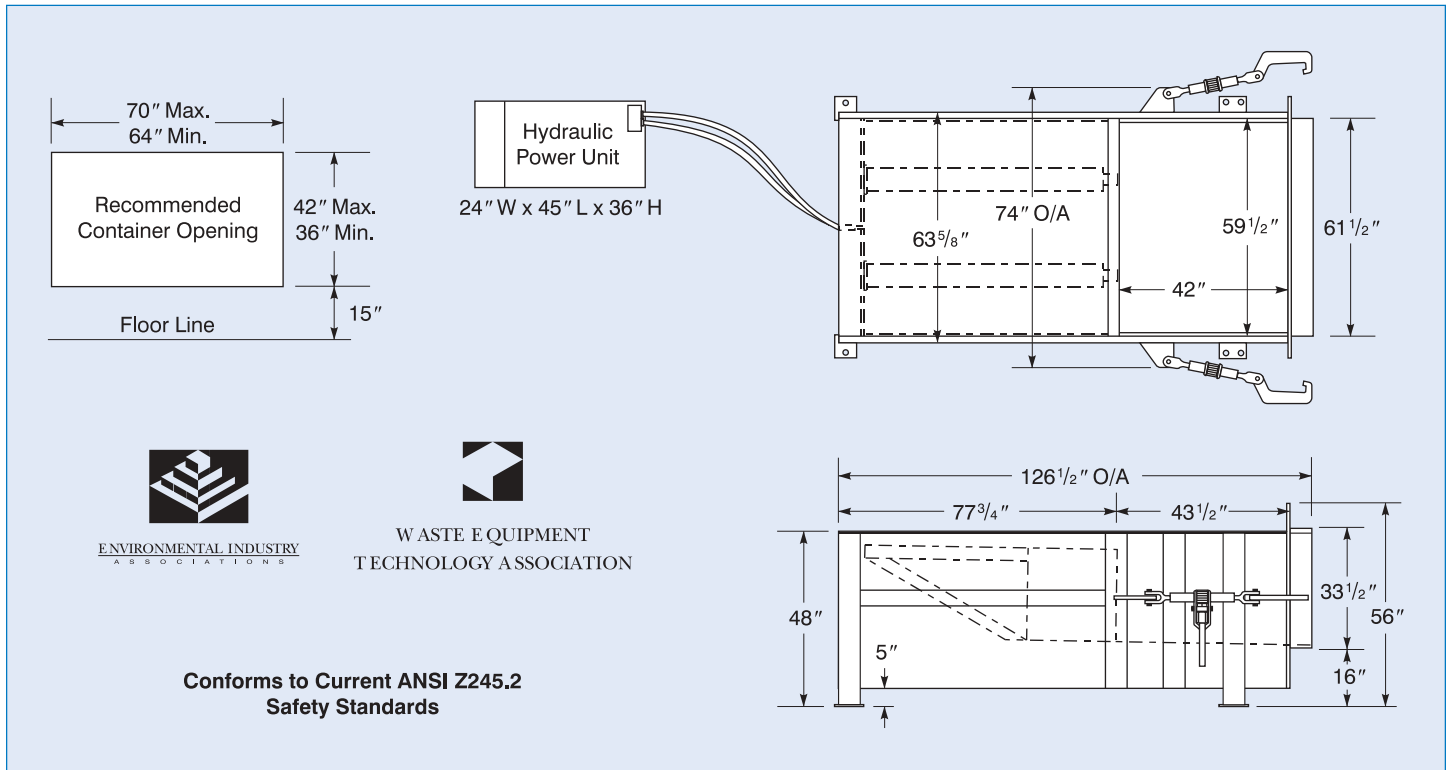

Standard Features

- Frame: Floor, Work Hardening Steel Plate 3/8" Floor Supports (6) C3 x 4.1# (1) C4 X 5.4# (1) C6 x 13#
- Side Plates 1/4"
- Side Supports (3) 6 x 8.2#
- Breaker Bar 1-1/2" x 8" Vertical Bar Weldment 1" x 4-1/2" Horizontal Bar
- Ram: Face Plate 5/8" Floor Plate 5/8" Side Plates 3/16" Top Plate 1/4" Top Supports (8) C4 x 5.4# Guides Adjustable Nylatron Blocks
- Removable Access Panels
- Weatherhood/Safety Panels
- Ratchet Binder/Hooks: 90,000# Capacity
- Remote Power Unit
- Reservoir: 40 Gallon Capacity
- Oil - Suitable for Wide Temperature Range
- Oil Sight Gauge w/Thermometer
- Pump: 16 GPM, Constant Displacement Vane Type
- Cylinders: (2) 5" Bore x 3" Rod x 60" Stroke
- UL Listed Electrical Components
- Motor: 10 HP Tri-Volt 3 PH
- Controls In Main Panel: Automatic Multicycle Automatic Safety Retract Automatic/Manual Selector Switch Ram Position Switch Full/Jam Automatic Shut-off w/Indicator Key Lock On/Off Switch Pull-To-Start/Emergency Push-To-Stop Button



Remote Power Unit

Optional Features

- Decks 750# & 10,000# Capacity
- Safety Handrails
- Safety Gate w/Interlock
- Side or Rear Load Hopper
- Enclosed Hopper w/Door
- Security Chute (Side or Rear)
- Full Enclosure
- Safety Interlock System
- Deodorizer Spray System
- UL Certified Panel
- Photo Electric Start System
- Keyed Pinning/Boost Override System
- Advance Full Load Indicator
- TEFC Motor
- Low Oil Indicator with Shut-off
- Thermo Oil Heater
- Power Unit Weather Cover
- Container Guide
- Through Wall Ratchet Kit

Ask Your Local Dealer For Additional Options

CAUTION! This equipment Should Be Operated By Properly Trained Personnel. Improper Use, Misuse or Lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. Due to its commitment to quality, SP Industries' specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing.

Distributed by:



SP INDUSTRIES, INC.
2982 Jefferson Road
Hopkins, MI 49328

Phone: 800-592-5959
In Mich.: (616) 793-3232
Fax: (616) 793-7451