


Compactor Specifications
Model CP-6002-D
6 Cu. Yd. Capacity, Industrial Stationary Compactor

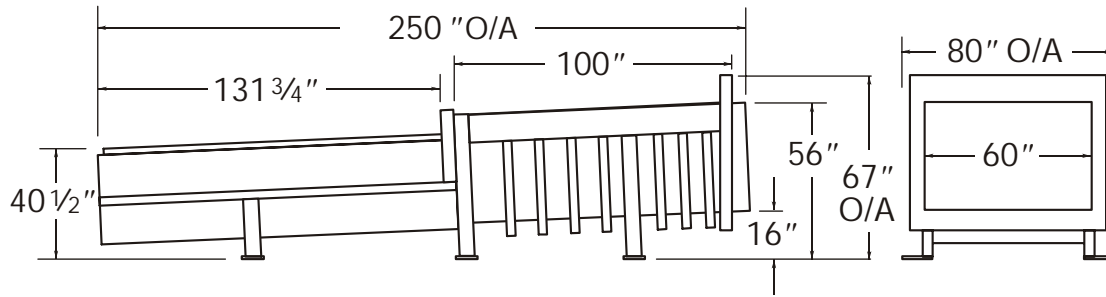

Material Specifications

Frame

Floor Plate, Work Hardening Steel	5/8"
Floor Plate Supports	S 5" x 10#, S 4" x 7.7#
Side Plates	1/2"
Side Reinforcements TS 8" x 3" x 1/4", 6" x 4" x 1/4", 6" x 3" x 1/4", 3" x 3" x 1/4"	
Breaker Bar	1-1/2" x 12" & 1-1/2" x 7" Bar
Ram Hold Down Bars	1" x 1" Bar
Load Binders	160,000# Capacity

Ram

Face Plate	1"
Floor Plate	1"
Side Plates	3/8"
Top Plate	1/2"
Top Plate Reinforcement	C 6 x 13#
Nylatron Side Guide System	

Specifications

WASTEC Type Rating (Cu. Yds.)	3.86
Cycle Time (Seconds)	77
Capacity Per Hour (Cu. Yds.)	180
Clear Top Opening L x W (Inches)	96" x 58"
Ram Penetration (Inches)	16
Ram Face Dimensions (Inches)	60 x 30
Packing Force (Lbs.)	
Normal	115,400
Maximum	138,500
Operating Pressure (PSI)	
Normal	1,500
Maximum	1,800
Cylinder Bore, Rod & Stroke (Inches)	(2) 7 x 5 x 116
Motor (HP)	30
Pump (GPM)	45
Oil Reservoir Capacity (Gallons)	75
Shipping Weight (Lbs.)	15,020



SP Industries, Inc., 2982 Jefferson Rd., Hopkins, MI 49328
 Phone: 800-592-5959, In MI (616) 793-3232, Fax (616) 793-7451