


Compactor Specifications
Model CP-7002
7 Cu. Yd. Capacity, Industrial Stationary Compactor

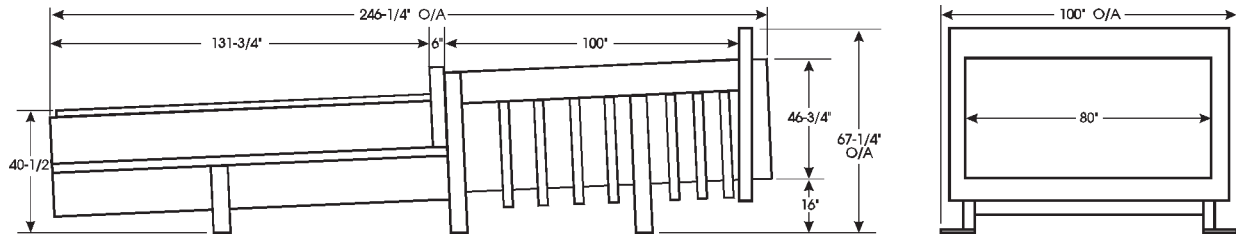

Material Specifications

Frame

Floor Plate	5/8" Work Hardening Steel
Floor Plate Supports	(2) 6" x 9" x 1/2" TS
Side Plates	1/2"
Side Reinforcements	TS 8" x 3" x 1/4" & 3" x 3" x 1/4"
Breaker Bar	1-1/2" x 12" & 1-1/2" x 7" Bar
Ram Hold Down Bars	1" x 1" Bar
Load Binders	160,000# Capacity

Ram

Face Plate	1"
Floor Plate	1"
Side Plates	3/8"
Top Plate	1/2"
Top Plate Reinforcement	C 6 x 13#
Nylatron Side Guide System	

Specifications

NSWMA Type Rating (Cu. Yds.)	5.14
Cycle Time (Seconds)	54
Capacity Per Hour (Cu. Yds. Not Under Load)	342
Clear Top Opening L x W (Inches)	96 x 78
Ram Penetration (Inches)	16
Ram Face Dimensions (Inches)	80 x 30
Packing Force (Lbs.)	
Normal	84,800
Maximum	101,800
Operating Pressure (PSI)	
Normal	1,500
Maximum	1,800
Cylinder Bore, Rod & Stroke (Inches)	(2) 6 x 4-1/2 x 116
Motor (HP)	30
Pump (GPM)	45
Oil Reservoir Capacity (Gallons)	100
Shipping Weight (Lbs.)	21,100



SP Industries, Inc., 2982 Jefferson Rd., Hopkins, MI 49328
 Phone: 800-592-5959, In MI (269) 793-3232, Fax (269) 793-7451

Specifications and design subject to change without notice pending improvements to our equipment.

CP-7002 STD
 12/03