


CP-125 Food Waste Compactor



Model CP-125 FW

- Motor and cylinders generate over 95,000 lbs. of pressure for maximum compression
- Rugged design includes 3/4" AISI 1040 floor plate & 1/2" side panels
- Reduces labor and handling
- Meets or exceeds ANSI Z245.2 Safety Standards
- System can be fully integrated into your production process to provide "Hands Free" scrap processing

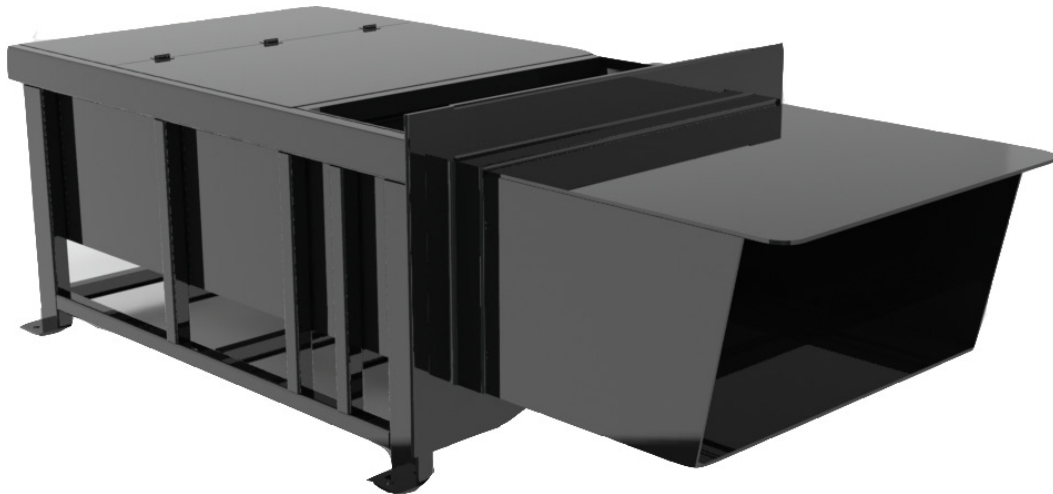

1.5 Cu. Yd. Capacity

- Ram penetration of 48" to prevent waste spillage
- Quality electrical and hydraulic components, specified for dependability, serviceability and nationwide availability
- Industry's Leading Warranty:
 - 3 Years on Ram and Frame Assemblies
 - 1 Year on All Parts
 - 1 Year on Labor

STANDARD FEATURES

Base Unit Weight 9,992 lbs.

- Frame: Floor, AISI 1045 Steel Plate 3/4"
Floor Supports S4 x 7.7#
Side Plates 1/2"
Side Reinforcements TS 6" x 3" x 1/4" &
TS 3" X 3" X 1/4"
Ram Hold Down Bar 1" x 1" Bar
Breaker Bar 1-1/2" x 8" Vertical &
1" X 4-1/2" Horizontal Bar
Load Binders 90,000# Capacity
- Ram: Face Plate 3/4"
Floor Plate 1/2"
Side Plates 1/4"
Top Plate 3/8"
Top Plate Reinforcement C4 x 5.4#
Nylatron Side Guide System
- Removable Access Panels
- Remote Power Unit w/ 10 ft. Hoses Limit Switch, & Power Cable
- Reservoir: 75 Gallon Capacity

- Cycle Time: 106 seconds
- Motor: 20 H.P. Tri-Volt 3 PH.
(FC: 30 H.P. Tri-Volt 3 PH.)
- Pump: 25 GPM (FC: 45GPM)
- Cylinder Bore, Rod, and Stroke
(2)6 X 3 X 66
- UL Listed Electrical Components
- Controls In Main Panel:
Key Lock On/Off Switch
Emergency Stop Button
Green Start Button
Automatic Multi Cycle
Automatic Safety Retract
Full Load/Jam Shut-off w/ Indicator Light



ENVIRONMENTAL INDUSTRY ASSOCIATION



WASTE EQUIPMENT TECHNOLOGY ASSOCIATION



Institute of Scrap Recycling Industries, Inc.

OPTIONAL FEATURES

- Adjustable Bottom Panels
- Covered Rear or Side Load Hopper Assembly
- Forks and Splash Shield Painted
- DD Carriage System for 155° Dump Angle
- Full Enclosure w/Smooth Sides & Plexiglass Windows
- Inside Vertical Lift or Swing Interlocked Door
- Auto Cycle System incl. Dump Cycle Counter
- Compactor Stand for Trailer Loading
- Trailer Guide System
- Dolly-Lok Trailer Restraint System w/ Indicators
- Jog-Off-Run Controls
- Main Controls Remote on 15' Cable
- PLC Integrated Controls
- Sonic Starting System
- Cycle Count System w/adv. Full and Full Load Indicators
- Hot/Low Oil Indicator with Shut-off
- UL Certified Controls and Panel
- Power Unit Cover w/Lockable Door
- Power Unit Oil Containment System
- Platform or Fork-type Scale
- Dumper
- Dumper Stand

!CAUTION! This equipment should be operated by properly trained personnel. Improper use, misuse or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. Due to its commitment to quality, SP Industries' specifications are subject to change without notice to accommodate improvements to its equipment. Information contained within this literature is intended to be the most accurate available at the time of printing.



Distributed By:



We are Social!



SP INDUSTRIES, INC.
2982 Jefferson Road
Hopkins, MI 49328

Phone: 800.592.5959 or 269.793.3232
Fax: 269.793.3232
Web: www.sp-industries.com
Email: sp_industries_inc@sp-industries.com